

# MARION COUNTY SURVEYOR'S OFFICE


## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 10 TWN. 15<sub>N</sub> RNG. 4<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 10-13-09  
Party Chief: Wilcoxon  
Crew: Finney  
Type of Marker: Harrison (no cap) EDM ties  
Method of Establishment: County: 10-19-1994  
IN S.P.C. E Zone, NAD 83  
Name: 15041004  
N: 500 988.831 0(m)  
E: 64 326.992 0(m)  
Adjusted 3-30-2004

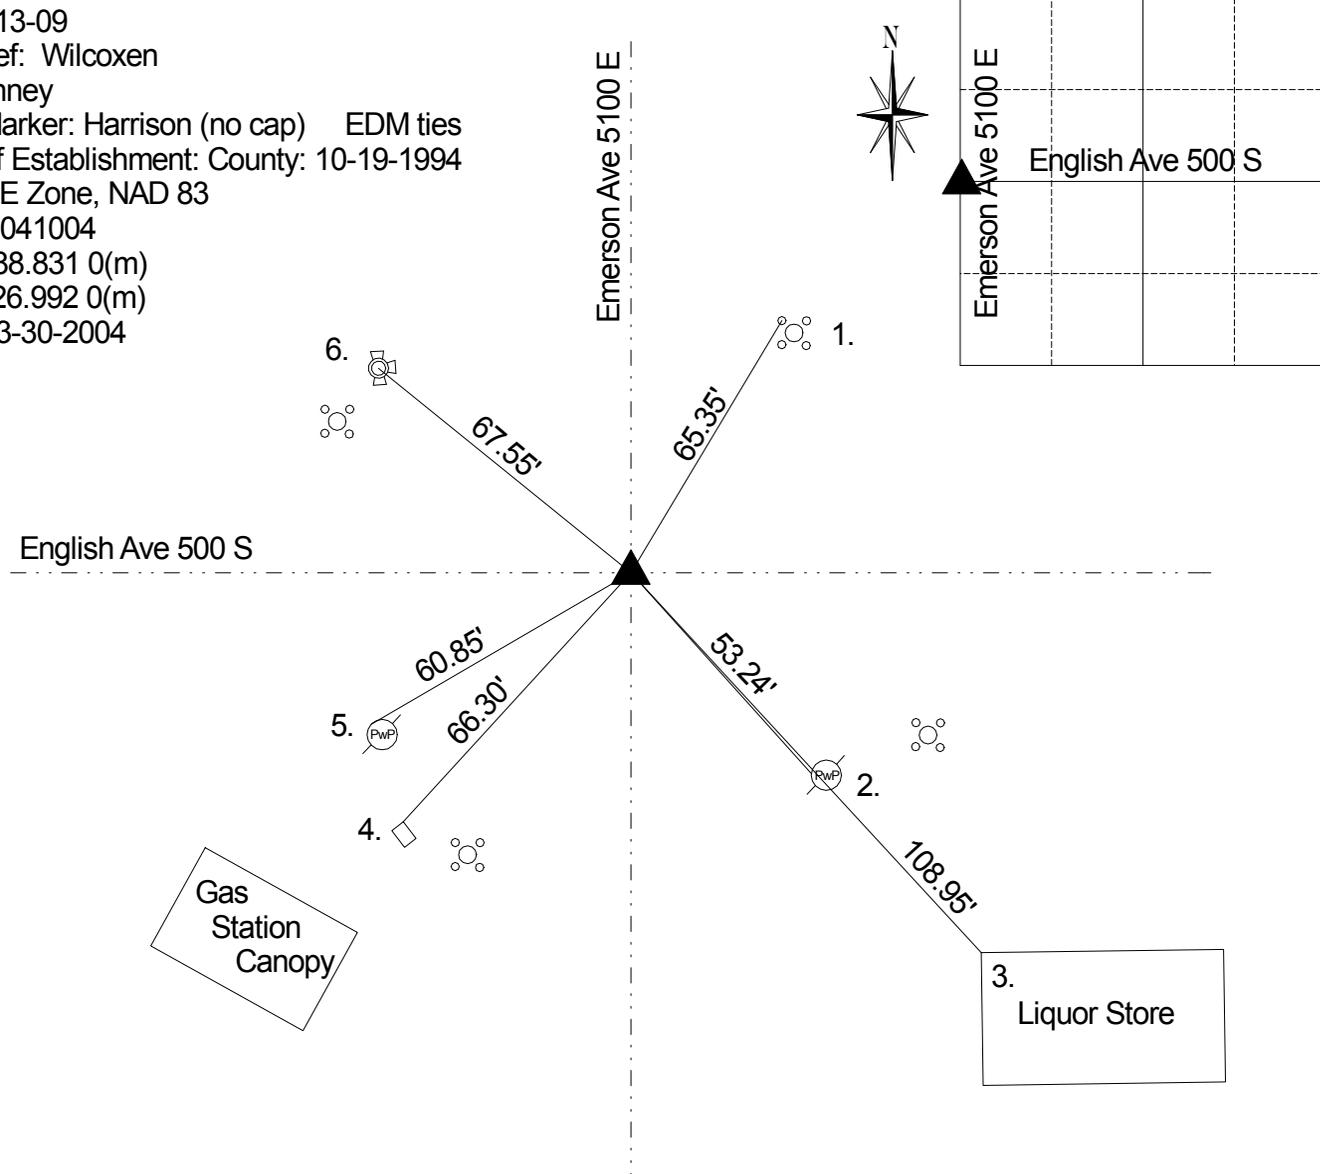

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 8" maple bearing S 2 E 35 links and a 10" hickory bearing N 33 links (Marion County Atlas p. 7). A legal survey by Hasbrook in 4/1853 indicates N, S & W distances from corner but no type of marker (Center Legal Book p. 24). Legal survey in 6/1855 gives distances to W & S corners but no marker (Center legal Book p. 25). A legal survey by Fatout in 2/1882 indicates a corner with one witness: a hickory bearing N on line 35 links (Warren legal Book p. 44). A legal survey by Unversaw in 3/1959 indicates a distance to center (Center Legal Book p. 194). Corner referenced by Wilcoxon on 11/16/78 and called a R.R. spike. Corner excavated by Green on 6/14/82 and a PK nail was found at surface over a R.R. spike. No stone or other monuments were found. A # 205 cast iron Harrison Monument was set in position as the corner. Corner referenced by Kiste on 10/19/94 and called a Harrison Monument. Corner referenced by Wilcoxon on 11/29/1999 and called a Harrison Monument. Corner referenced by Wilcoxon on 10/13/2009 and called a Harrison Monument with no cap.

REF.	DISTANCE	DESCRIPTION
1.	65.35'	Cut 'x' NW bolt of signal post
2.	53.24'	PK nail SW PwP #43-54 A 2" up
3.	108.95'	NW corner of store
4.	66.30'	NW corner of metal signal box
5.	60.85'	PK nail NW PwP #207-573 A 8" up
6.	67.55'	Top nut of fire hydrant